
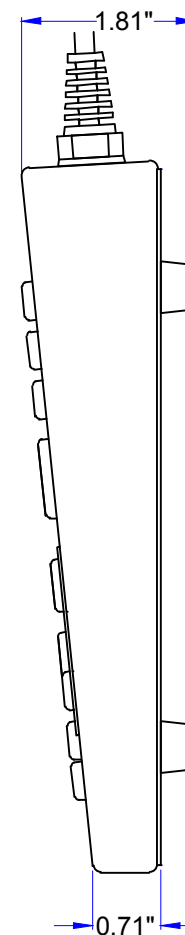


# DT-102-SS

DATE	CHANGES	INTL	REV
09.30.09	Original	JB	1.0
11.12.10	Updated operating temperature	JMW	1.1
11.30.11	Updated Case Dimensions	TWH	1.2

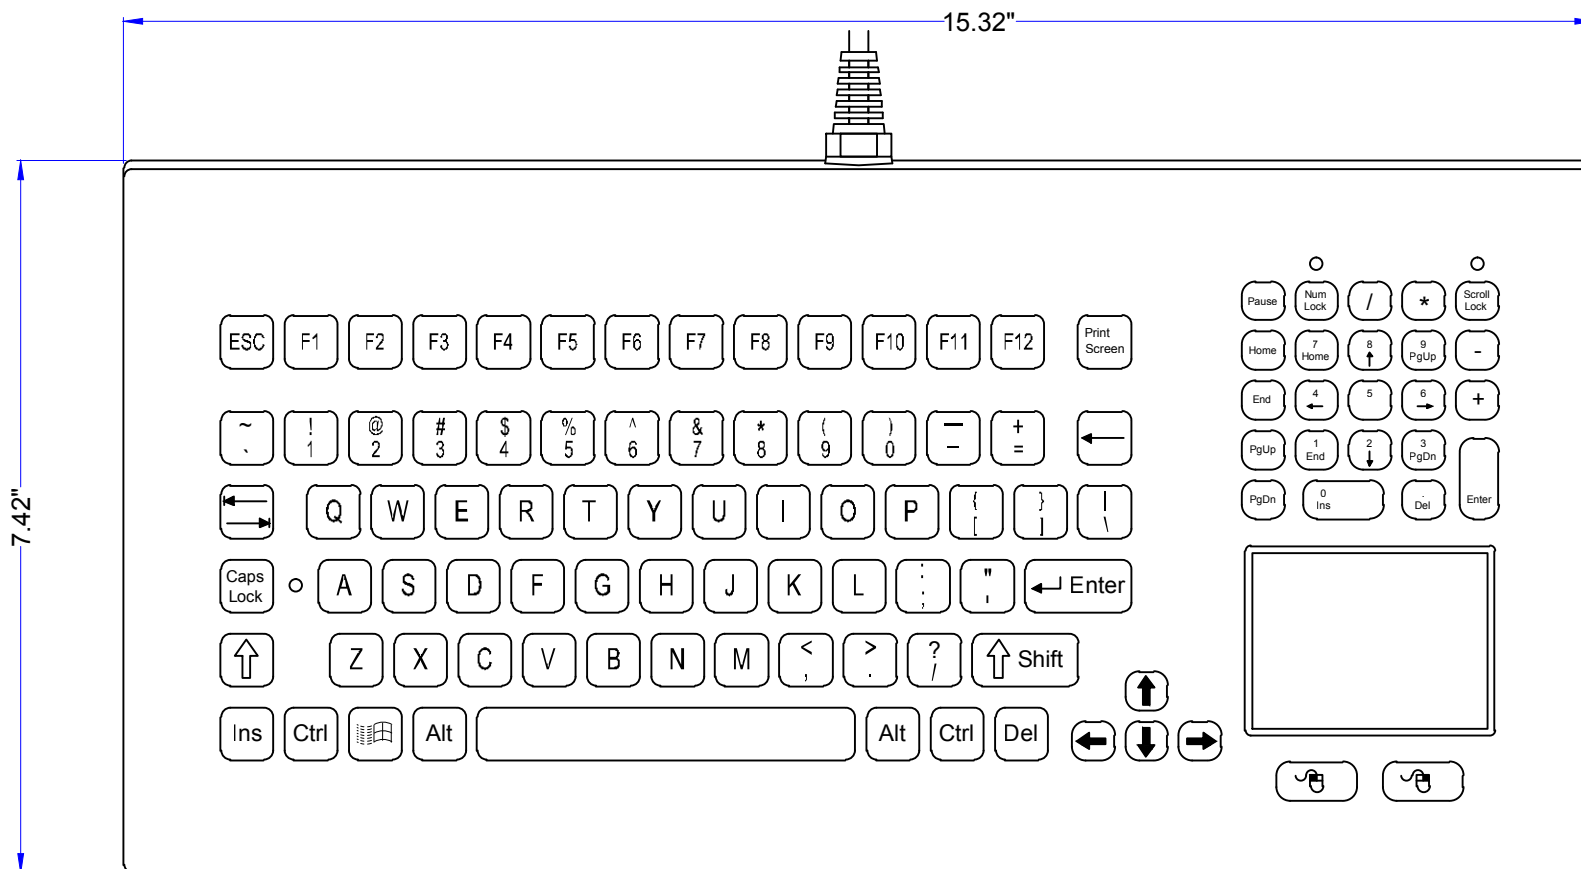

## KEY SWITCH

MATERIAL: Brushed Stainless Steel  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.079 in.  
 ACTUATION FORCE: 4.23 oz. +/- 0.18oz (120g +/- 5g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +149°F (-40°C to +65°C)  
 OPERATING: -4°F to +140°F (-20°C to +60°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g<sup>2</sup>/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2:  
 KEYBOARD: 50mA@5V (from Keyboard port)  
 POINTER: 10mA@5V (from Mouse port)  
 USB: 60mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

5.50 lbs +/- 0.10 lbs (2.49 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
 2621 Ridg epoint Dr. Suite 235  
 Austin, Texas 78754

©2011 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: DT-102-SS

Drawing Title: DT-102-SS-MKT

Drawing Number: MKT0219


Revision: 1.2

Sheet: 1 OF 2

Date: 11.30.11

TWH

# DT-102-SS BACK / MOUNTING

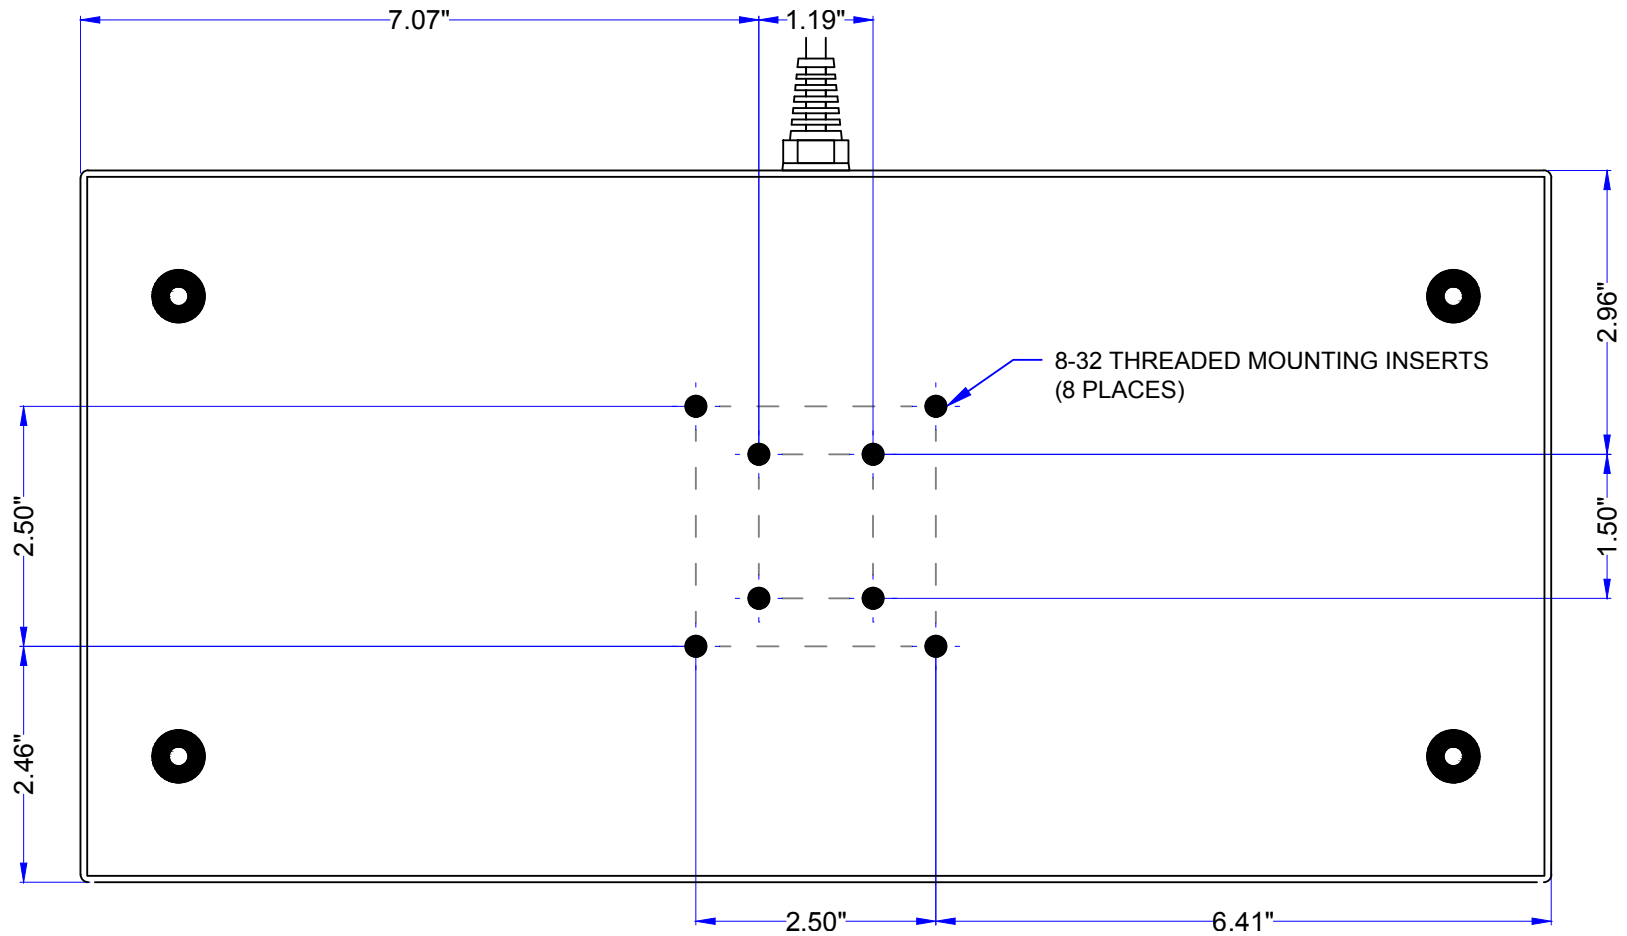

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
2621 Ridgepoint Dr. Suite 235  
Austin, Texas 78754

©2011 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: DT-102-SS  
Drawing Title: DT-102-SS-MKT

Drawing Number: MKT0219  
Revision: 1.2

Sheet: 2 OF 2  
Date: 11.30.11  
TWH