


# DT-2000-TB

DATE	CHANGES	INTL	REV
08.25.04	Original		1.0
06.03.09	Updated Format, Removed Mounting Details	JB	2.0

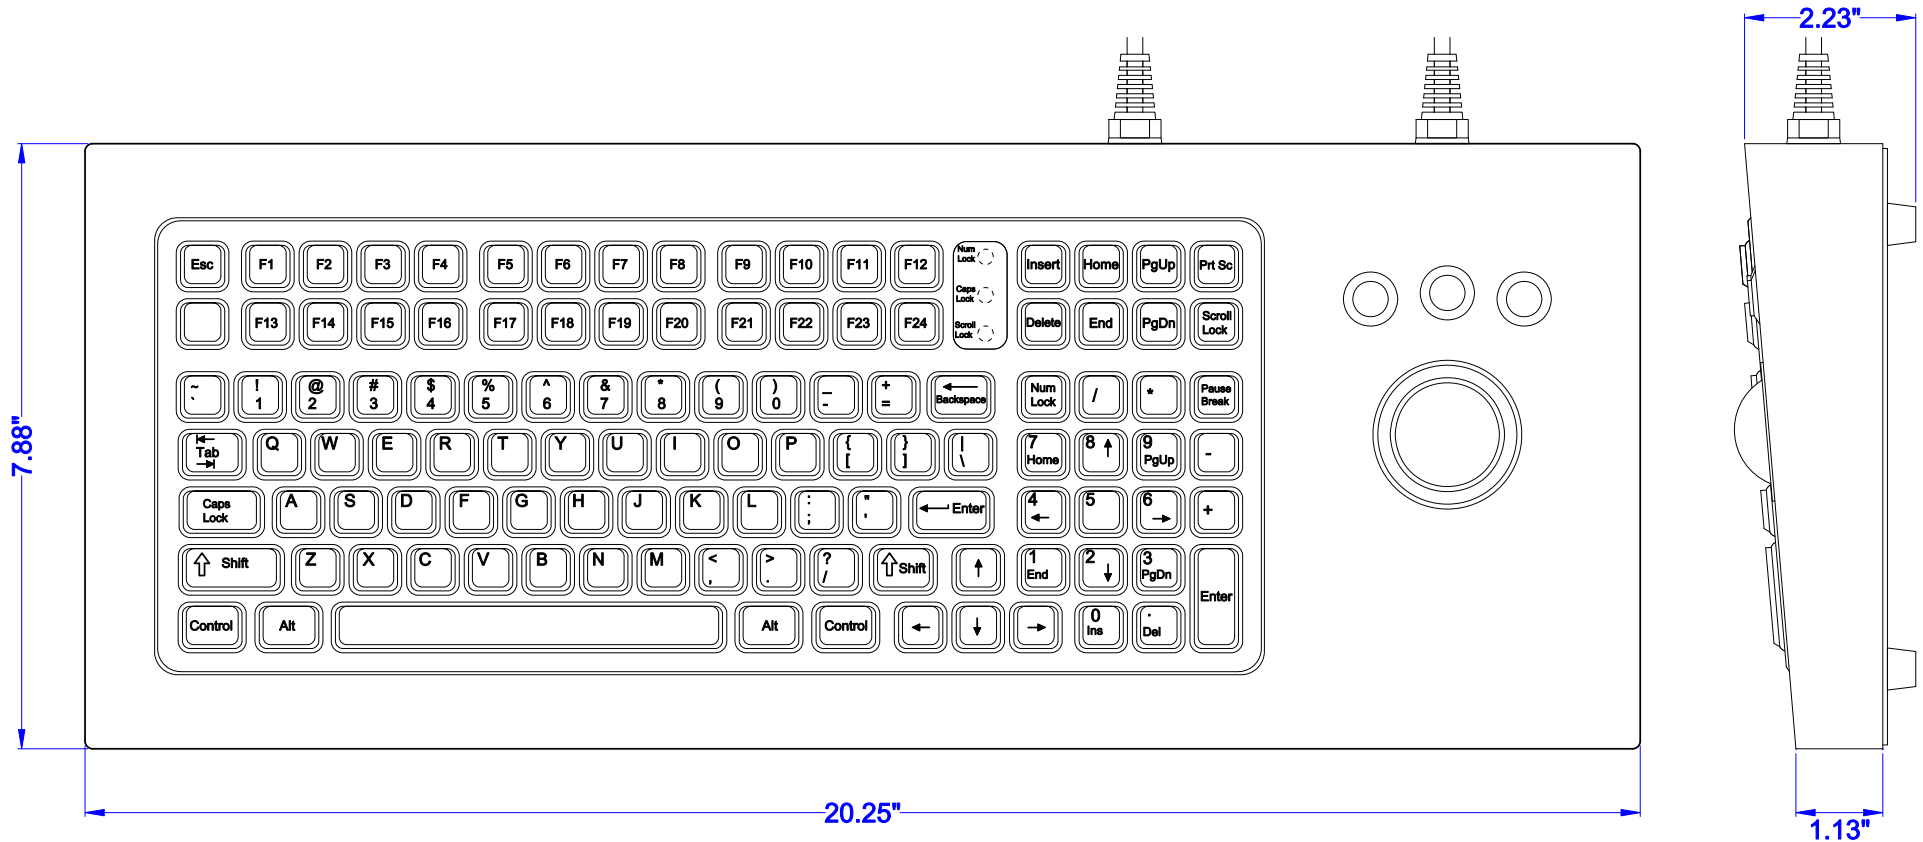

## KEY SWITCH

**MATERIAL:** Industrial Silicone Rubber  
**LIFE:** Greater Than 10 Million Cycles  
**TRAVEL:** 0.055 in.  
**ACTUATION FORCE:** 7.03 oz. +/- 1.06oz (200g +/- 30g)  
**FEEDBACK:** Tactile with Mechanical Snap

## POWER

**PS2:**  
**KEYBOARD:** 50mA@5V (from Keyboard port)  
**POINTER:** 45mA@5V (from Mouse port)  
**USB:** 95mA@5V (from CPU port)

## TEMPERATURE RANGE

**STORAGE:** -40°F to +185°F (-40°C to +85°C)  
**OPERATING:** +32°F to +131°F (0°C to +55°C)

## HUMIDITY

100% Humidity Resistant

## VIBRATION

**POWER SPECTRAL DENSITY:** .04g<sup>2</sup>/HZ  
**FREQUENCY RANGE:** 20Hz-2Khz  
**DURATION OF TEST PER AXIS:** 3 hours

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

8.25 lbs +/- 0.10 lbs (3.74 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.5



**iKey, Ltd.**  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754

©2008 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8630

Part Number: DT-2000-TB

Drawing Title: DT-2000-TB-MKT

Drawing Number: MKT0029

Revision: 2.0

Sheet: 1 OF 1

Date: 06.03.09

JWB