
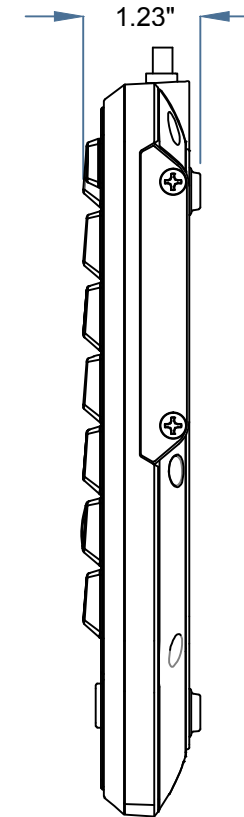


IK-TR-88-911-TP

DATE	CHANGES	INTL	REV
02.18.14	Original	TH	1.0

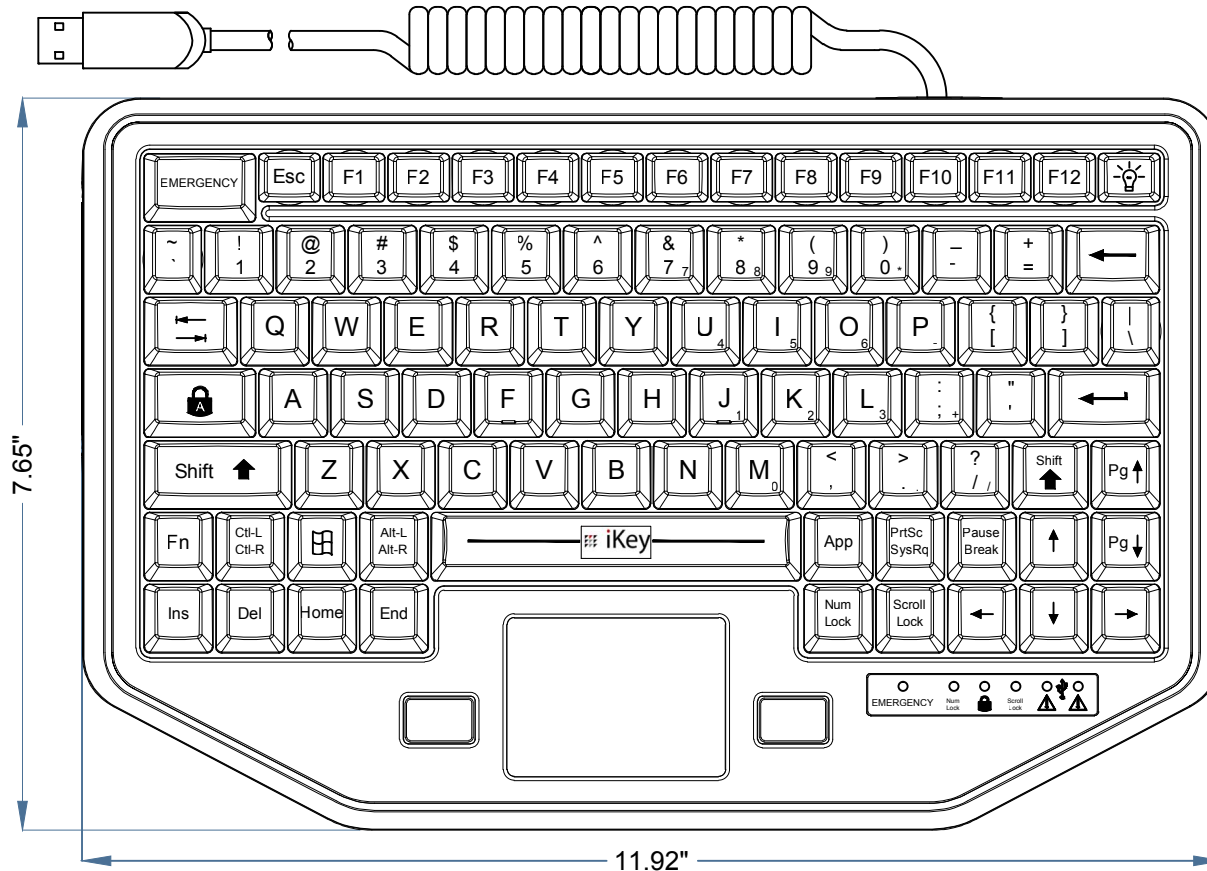

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.03 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +167°F (-40°C to +75°C)
OPERATING: -4°F to +140°F (-20°C to +60°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

POWER

USB: 35mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.0 lbs +/- 0.10 lbs (0.90 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgepoint Dr. Suite 235
 Austin, Texas 78754

©2013 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: IK-TR-88-911-TP

Drawing Title: IK-TR-88-911-TP-MKT

Drawing Number: MKT0357


Revision: 1.0

Sheet: 1 OF 2

Date: 02.18.14

TWH

IK-TR-88-911-TP MOUNTING

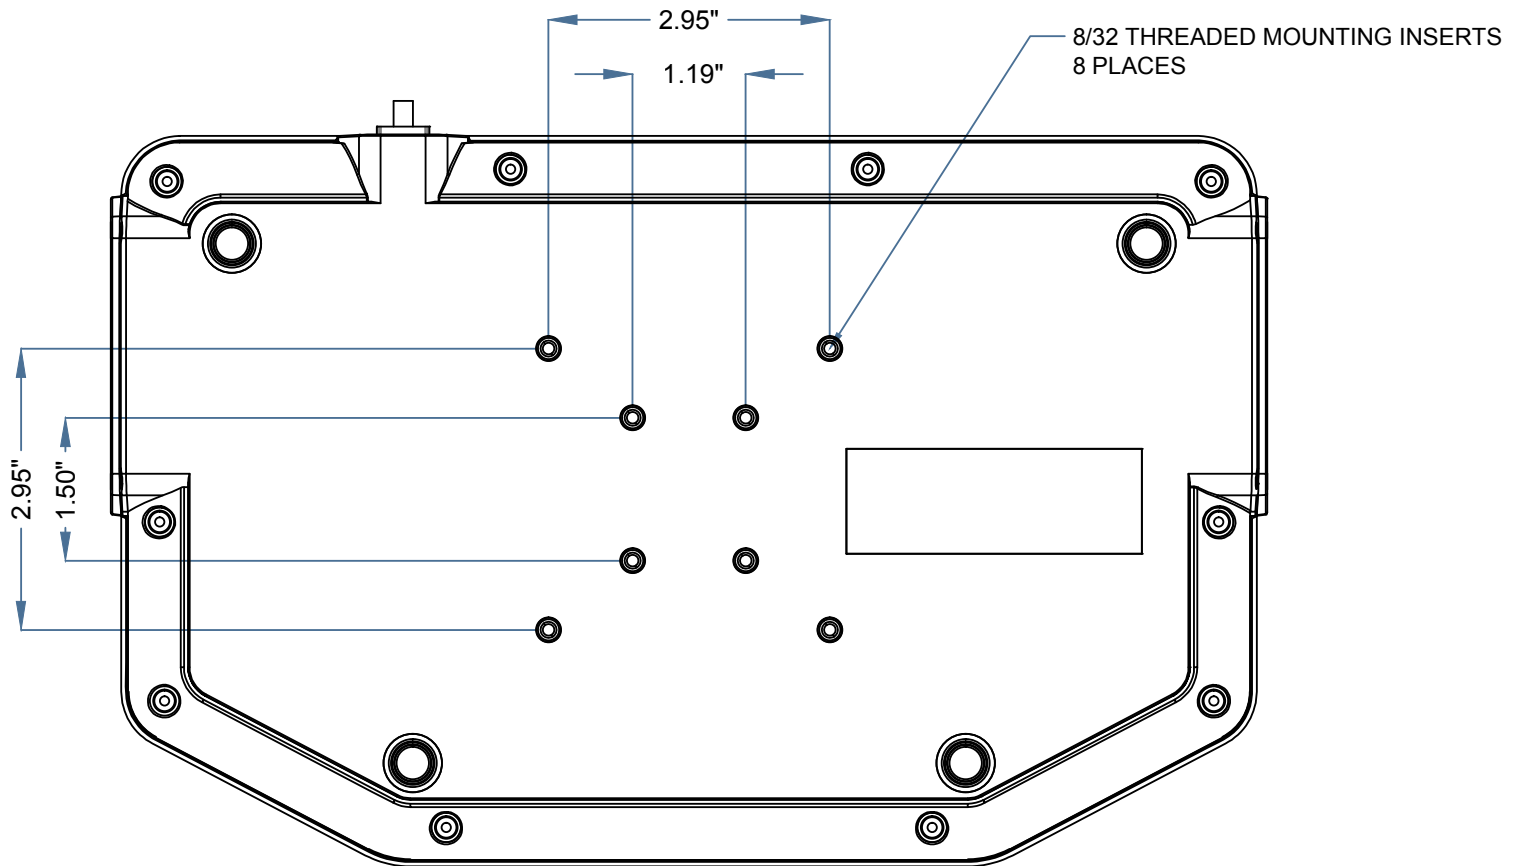

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2013 iKey, Ltd.

Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: IK-TR-88-911-TP

Drawing Title: IK-TR-88-911-TP-MKT

Drawing Number: MKT0357

Revision: 1.0

Sheet: 2 OF 2

Date: 02.18.14

TWH